




Thinpad

The Thinnest LED Screen in the World !

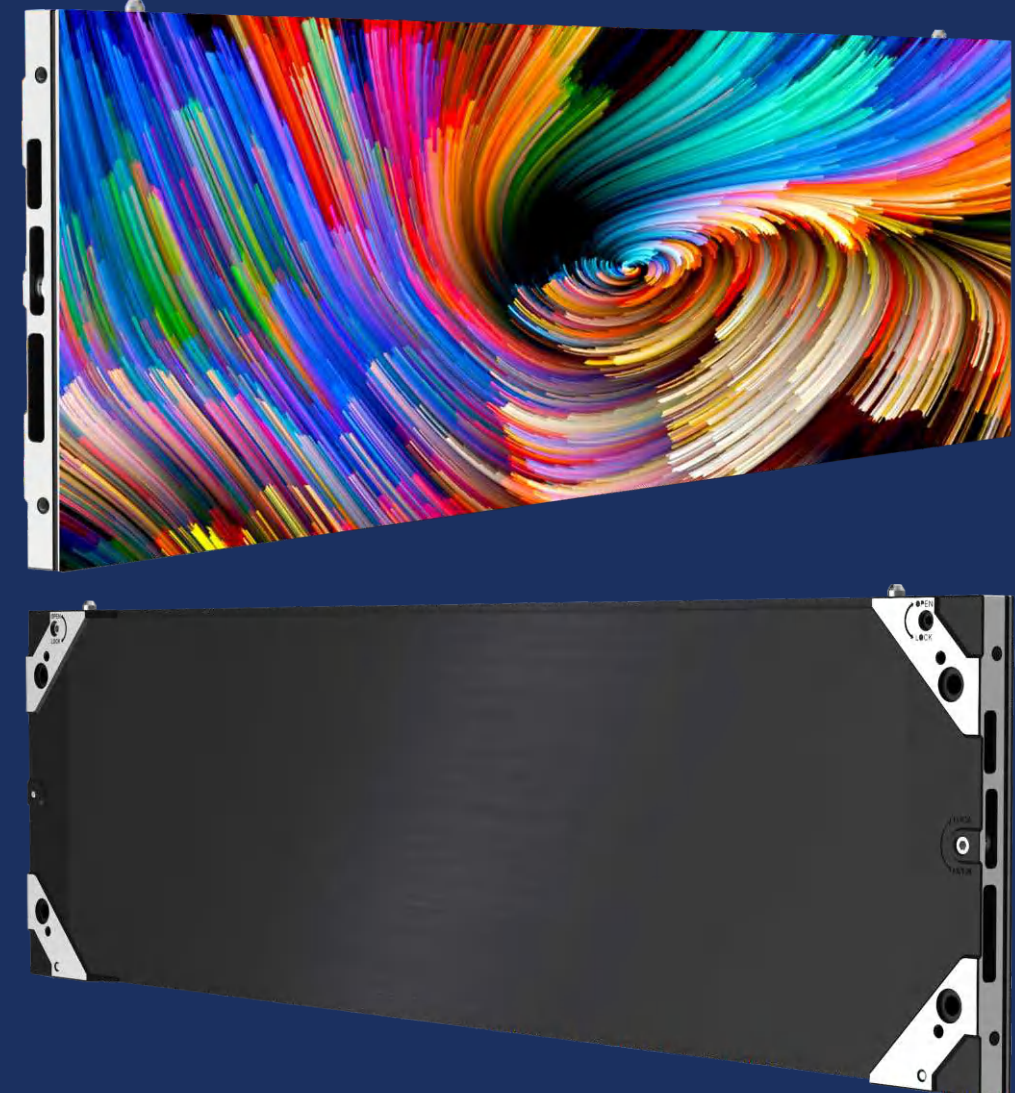

Shenzhen Fabulux Technology Co.,Ltd.
www.fabuluxled.com
fabulux@fabuluxled.com

Thinpad




Various Installation Methods

Wall-mounted


Ground stacking

Truss rigging


8:9 and 16:9 ratio make screen size freely

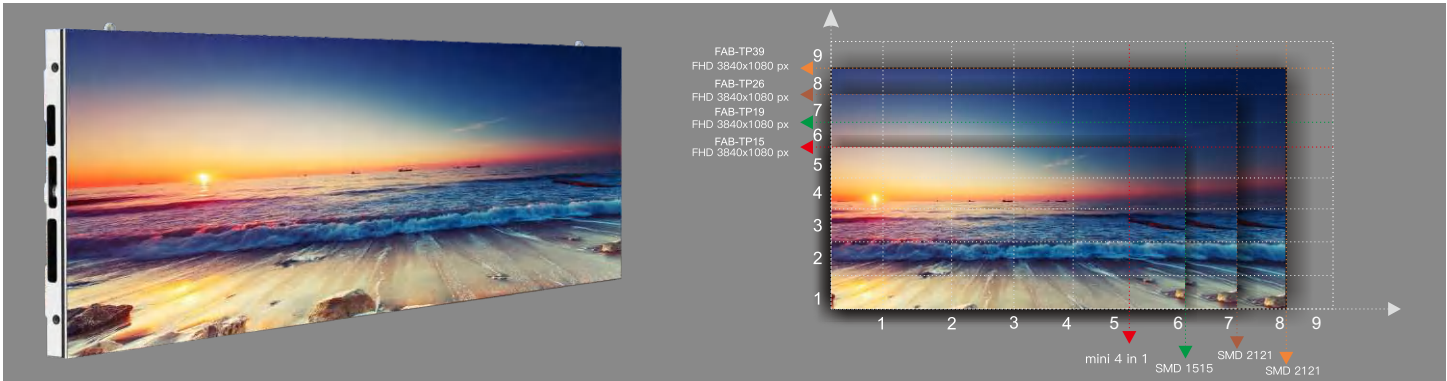

▶ 1.5mm (mini), 1.9mm, 2.6mm, 3.9mm available ▶ full front service

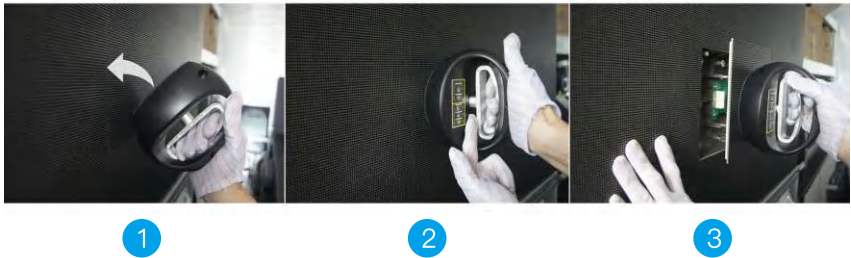

N+1, flexible arrangement

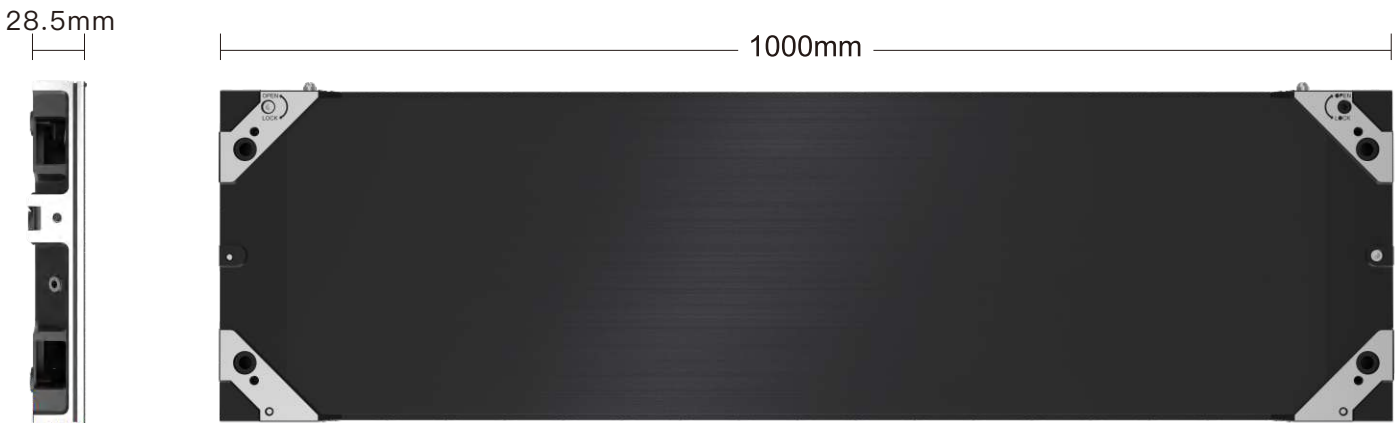

Specifications

Item Number	FAB-TP15	FAB-TP15	FAB-TP19	FAB-TP26	FAB-TP39
Pixel Pitch	1.5	1.5	1.9	2.6	3.9
Pixel Density	409600 dots/m ²	409600 dots/m ²	262144 dots/m ²	147456 dots/m ²	65536 dots/m ²
LED Arrangement	mini 4 in 1	SMD1010	SMD1515	SMD2121	SMD2121
Module Resolution	160*180	160*180	128*144	96*108	64*72
Module Dimension	250*281.25	250*281.25	250*281.25	250*281.25	250*281.25
Panel Dimension	500*281.25	500*281.25	500*281.25/750*281.25	500*281.25/750*281.25/1000*281.25	500*281.25/750*281.25/1000*281.25
Panel Weight	3.5kg	3.5kg	3.5kg/4.5kg	3.5kg/4.5kg/5.7kg	3.5kg/4.5kg/5.7kg
Brightness Level	600nits	800nits	1000nits	1000nits	1000nits
Max Power Consumption	570W/m ²	500W/m ²	400W/m ²	400W/m ²	420W/m ²
Ave Power Consumption	220W/m ²	200W/m ²	160W/m ²	160W/m ²	170W/m ²
Visual View Angle	160°/140°	160°/140°	160°/140°	160°/140°	160°/140°
Operating Power Source	110-220V/200-240V	110-220V/200-240V	110-220V/200-240V	110-220V/200-240V	110-220V/200-240V
Operating Temperature	-20~ +45	-20~ +45	-20~ +45	-20~ +45	-20~ +45
Refresh Rate	3840	3840	3840	3840	3840
Protecting Rating	IP20	IP20	IP20	IP20	IP20
Signal Input Source	S-video, VGA, DVI, HDMI, SDI	S-video, VGA, DVI, HDMI, SDI	S-video, VGA, DVI, HDMI, SDI	S-video, VGA, DVI, HDMI, SDI	S-video, VGA, DVI, HDMI, SDI
Certificate	CB,ETL,FCC,EMC,CB	CB,ETL,FCC,EMC,CB	CB,ETL,FCC,EMC,CB	CB,ETL,FCC,EMC,CB	CB,ETL,FCC,EMC,CB