





More Than Just LED Poster, Realize Your
Multi Type Application



Shenzhen Fabulux Technology Co.,Ltd.
www.fabuluxled.com
fabulux@fabuluxled.com

Ultra Slim and golden Ratio

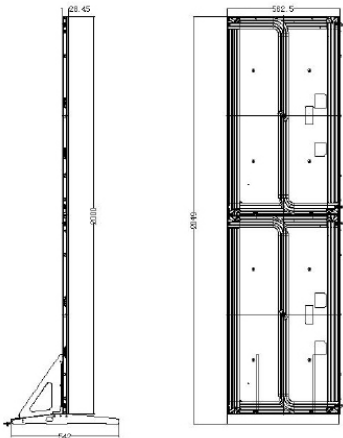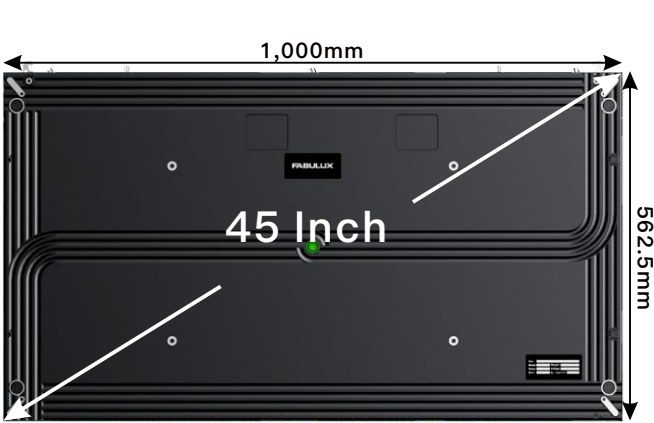

Flexible installation way



Wall Mounted



Hanging



Stacking

Seamless Splicing with multi Screen

- Movable Frame
single unit with frame protection
Multi units in Seamless Splicing




Convenient maintenance and safety

Front Maintenance



Signal And Power Pupply Backup Optional

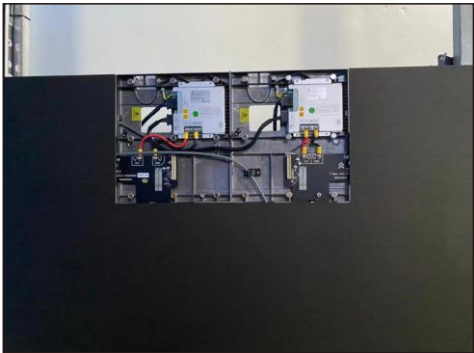

Multiple Control Way

- Mobile phone
- Computer/Wi-Fi LAN
- USB connection
- Tmax poster can be operated by an IOS or Android App.
- Easily change and save the content on the display from a phone or computer



USB



RJ45



Laptop



Cloud



HDMI Sync



Viplex Handy App

Specification

Item	1.9mm GOB	2.6mm	3.9mm
Brightness(nit)	800-1000	800-1000	800-1000
Refresh Rate	3840HZ	3840HZ	3840HZ
Power consumption (max/ave/m2)	400/160w/m2	400/160w	400/160w
Module resolution(dots)	128*144dots	96*108dots	64*72dots
Module size(mm)	250*281.25mm	250*281.25mm	250*281.25mm
Screen Resolution	288*1024dots	216*768dots	144*512dots
Screen Size(w*h)(mm)	562.5*2000*28.5mm	562.5*2000*28.5mm	562.5*2000*28.5mm
screen net weight	23.4kg	23.4kg	23.4kg
Maintenance way	Front Maintenance	Front Maintenance	Front Maintenance
Waterproof level	IP20	IP20	IP20
input voltage	11-240v 50/60hz	11-240v 50/60hz	11-240v 50/60hz
operation humidity/temperature	-20C-40C ° /10-90%	-20C-40C ° /10-90%	-20C-40C ° /10-90%