


FABULUX LED
MAKING FABULOUS PRODUCTS



Spider Series(Mini 4in1 LED)

Ultimate Solution for indoor Rental market

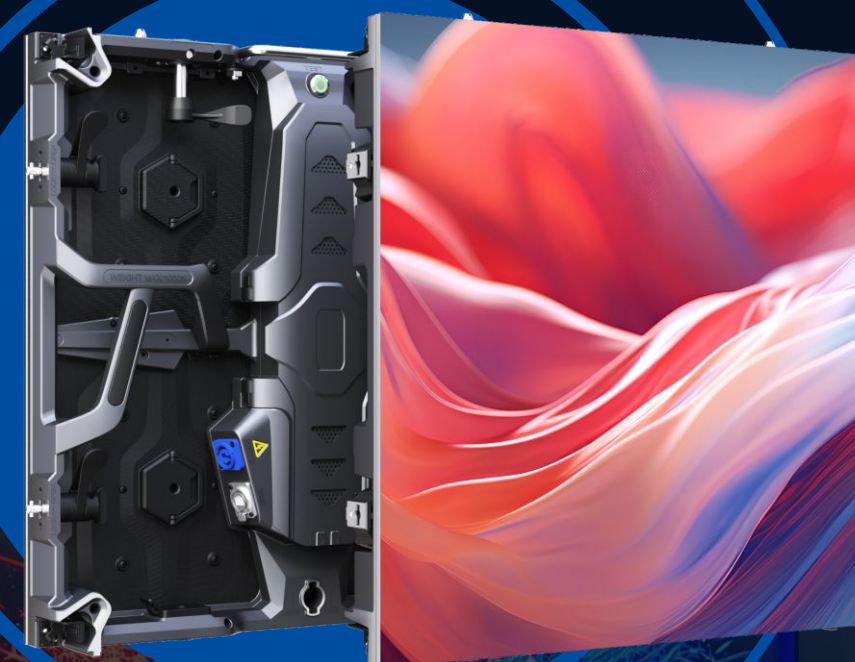

Key features



4in1(TOP LED)



Moire Reduction



Anti-collision



Perfect structure



HDR10 Technology

Extremely Real display performance



Up to 1,500nits
High Brightness



7,680HZ
High Refresh rate



16 bit
High gray scale



DCI-P3
DCI-P3 standard



Smart module



160 degree
Wide view angle



10,000: 1
High contrast ratio



HDR10 technology
Precise color



Nano-coating



corner protection

Practical cabinet structure design



Curved lock system



Rigging&stacking bar



Universal module



Back up signal

Meet Various indoor medium and high-end rental application needs



Concert



Conference



Exhibition



Church




TV Studio




Cinema

Strong Anti-collision ability & Reliability

Unique strong Mini 4in1 LED, can bear
13KG impact force per pixel.

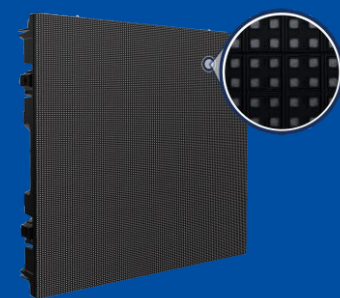

Perfect corner solution

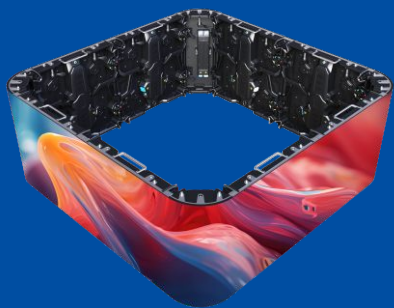

Specification

Model Name	FAB-SP1.95Mini	FAB-SP1.95HMini	FAB-SP2.6Mini	FAB-SP2.6HMini
Pixel Pitch (mm)	1.95	1.95	2.6	2.6
Pixel Density (dot/m ²)	262,144	262,144	147,456	147,456
LED Sealing Type	Mini 4in1	Mini 4in1	Mini 4in1	Mini 4in1
Module Resolution (PX* PX)	128*128	128*128	96*96	96*96
Module Size (mm * mm)	250*250	250*250	250*250	250*250
Module Weight (kg)	0.6	0.6	0.6	0.6
Module Thickness	24.8mm	24.8mm	24.8mm	24.8mm
Contrast Ratio	10,000:1	12,000:1	10,000:1	12,000:1
Drive Mode	Constant Current	Constant Current	Constant Current	Constant Current
Horizontal Viewing Angle (Deg)	160	160	160	160
Vertical Viewing Angle (Deg)	140	140	140	140
Brightness (cd/m ²)	1,300	1,500	1,300	1,500
Grey Scale (bit)	14	16	14	16
Refresh Rate (Hz)	3,840	7,680	3,840	7,680
Max Power Consumption(W/SQM)	< 500	< 560	< 500	< 570
Average Power Consumption (W/SQM)	< 150	< 168	< 150	< 170
Cabinet Size (mm * mm)	500*500			
Cabinet Weight (Kg)	8.2			
Cabinet Thickness(mm)	71			
Input Voltage (V)	AC110-220V			
Working Temperature (°C)	-20~+50°C			
Working Humidity (RH)	10%-90%			
Ingress Protection	IP20			
Working Environment	Indoor			
Maintenance Type	Front/Rear			
Certificates	CE(LVD, EMC), FCC, PSE, ETL, CB			



Spider Series(Mini 4in1 LED)

Spider Series(Mini 4in1 LED)

