

FABULUX LED

MAKING FABULOUS PRODUCTS



Master Series

Fabulux Master series is One for All solution; it offers indoor and outdoor rental led displays and Mini-LED rental options.



●Platform design

All indoor & outdoor modules share the same panel frame, HUB card, Power supply



●One-man Installation within 3 Seconds

Handle Design

one-manto complete the installation


Automatic Lock System

Assemble and disassemble within 3s




●An Integrated Climbing System

Allows for onsite technicians to service the screen and have the secure footing

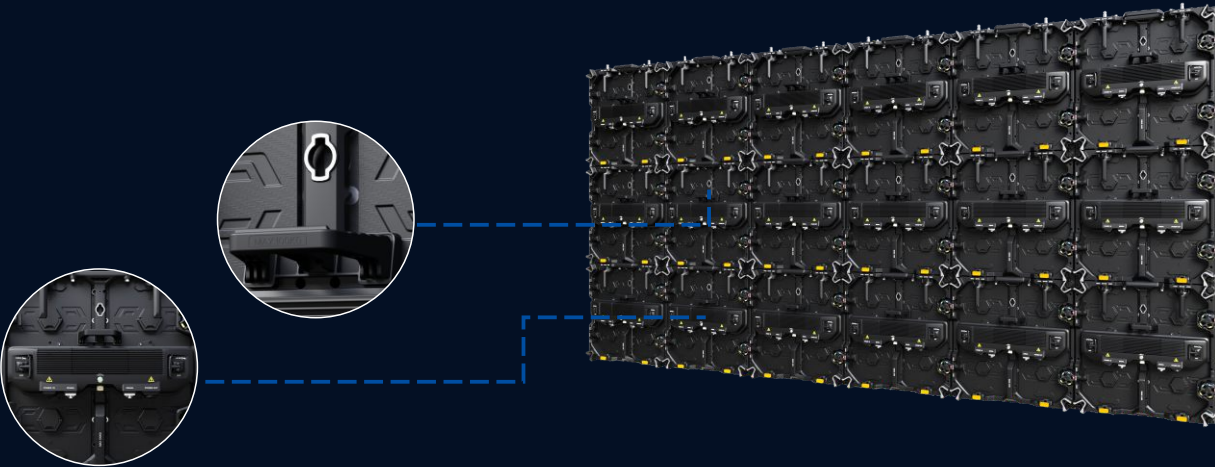

●Accurate curve lock

+6° +3° 0° -3° -6°
5 different angles for options

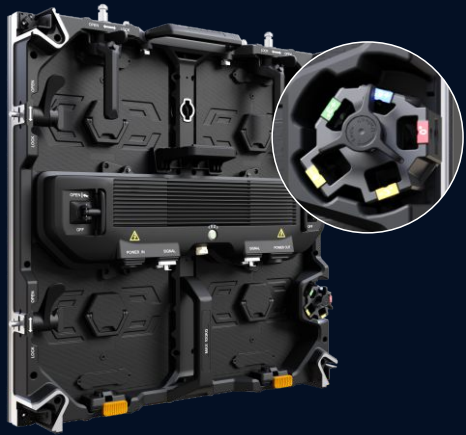

●Specification

Item Number	FAB-MAS26in	FAB-MAS29in	FAB-MAS39in	FAB-MAS48in
Pixel Pitch	2.6mm	2.9mm	3.9mm	4.8mm
Pixel Density	147456pixels/m ²	112,896pixels/m ²	65536pixels/m ²	43264pixels/m ²
LED Arrangement	SMD1515	SMD2121	SMD2121	SMD2121
Module Resolution	96*96pixels	84*84pixels	64*64pixels	52*52pixels
Module Dimension	250*250mm	250*250mm	250*250mm	250*250mm
Panel Dimension	500*500*73.7mm	500*500*73.7mm	500*500*73.7mm	500*500*73.7mm
Cabinet Weight(Kg)	8.5	8.5	8.5	8.5
Brightness Level	800-1,000nits	800-1,000nits	800-1,000nits	800-1,000nits
Max Power Consumption	<440w/m ²	<440w/m ²	<450w/m ²	<450w/panel
Ave Power Consumption	<135w/m ²	<135w/m ²	<135w/m ²	<135w/panel
Visual View Angle	160°/140°	160°/140°	160°/140°	160°/140°
Operating Power Source	100-240V AC 50-60Hz	100-240V AC 50-60Hz	100-240V AC 50-60Hz	100-240V AC 50-60Hz
Operating Temperature	(-20~ +50)	(-20~ +50)	(-20~ +50)	(-20~ +50)
Refresh Rate	3840	3840	3840	3840
Protecting Rating	IP20	IP20	IP20	IP20
Certificate	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL	CE(LVD、EMC)、FCC、ETL

Item Number	FAB-MAS29ou	FAB-MAS39ou	FAB-MAS48ou
Pixel Pitch	2.9mm	3.9mm	4.8mm
Pixel Density	112,896pixels/m ²	65,536pixels/m ²	43264pixels/m ²
LED Arrangement	SMD1515	SMD1921	SMD1921
Module Resolution	84*84pixels	64*64pixels	52*52pixels
Module Dimension	250*250mm	250*250mm	250*250mm
Panel Dimension	500*500*74.5mm	500*500*74.5mm	500*500*74.5mm
Cabinet Weight (Kg)	9.1	9.1	9.1
Brightness Level	4000-4500nits	4500-5000nits	4500-5000nits
Max Power Consumption	<750w/m ²	<700w/m ²	<700w/m ²
Ave Power Consumption	<225w/m ²	<210w/m ²	<210w/m ²
Visual View Angle	160°/120°	160°/120°	160°/120°
Operating Power Source	100-240V AC 50-60Hz	100-240V AC 50-60Hz	100-240V AC 50-60Hz
Operating Temperature	(-20~ +50)	(-20~ +50)	(-20~ +50)
Refresh Rate	3840	3840	3840
Protecting Rating	IP65	IP65	IP65
Certificate	CE(LVD、EMC)、FCC、PSE、ETL	CE(LVD、EMC)、FCC、PSE、ETL	CE(LVD、EMC)、FCC、PSE、ETL